

HIGH HEAT RESISTIVITY

DESCRIPTION

The NEXEM EP2F / EP1F series are PC-board mount type automotive relays suitable for various motor controls and other applications that require a high level of quality and performance.

The operate temperature range for EP2F / EP1F series is -40°C through $+125^{\circ}\text{C}$.

By this high heat resistivity, the contact carrying current of EP2F / EP1F series at 25°C increases 1.3 or 1.4 times compared with that of EP2 / EP1 series.

FEATURES

- Operating ambient temperature up to $+125^{\circ}\text{C}$ (EP2 / EP1 : $+85^{\circ}\text{C}$)
- Suitable for motor and solenoid reversible control
- High performance and productivity by unique structure
- Flux tight housing

APPLICATIONS

- Power window control
- Power sunroof
- Wiper system



EP2F SERIES



EP1F SERIES

For Proper Use of Miniature Relays DO NOT EXCEED MAXIMUM RATING

Do not use relay under excessive conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating and damage to the relay or other parts.

READ CAUTIONS IN THE SELECTION GUIDE

Read the cautions described in EM Devices' "Miniature Relays" before dose designing your relay applications.

The information in this document is subject to change without notice.


© EM Devices Corporation 2018



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.


SCHEMATIC (BOTTOM VIEW)

EP2F SERIES

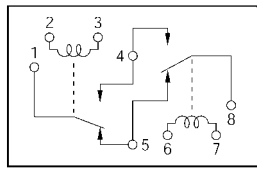


[Unit A] [Unit B]
[H Bridge Type]

EP1F SERIES

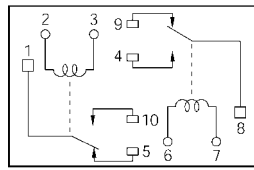


[Unit A] [Unit B]
[Separate Type]




DIMENSIONS mm (inch)

H Bridge Type

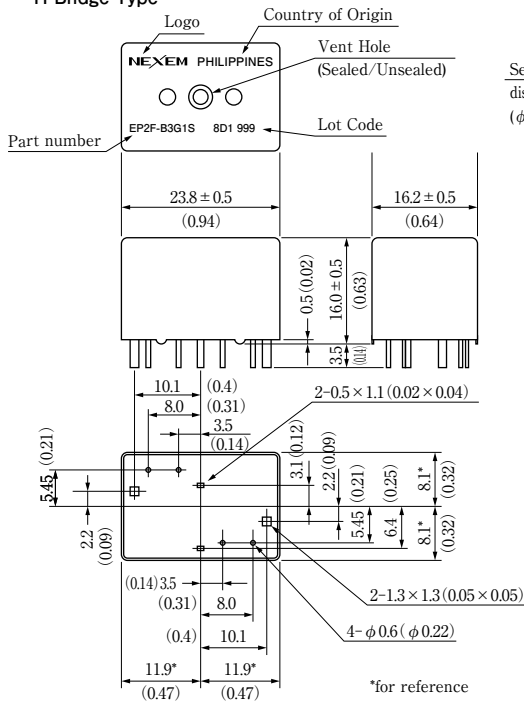


Separate Type

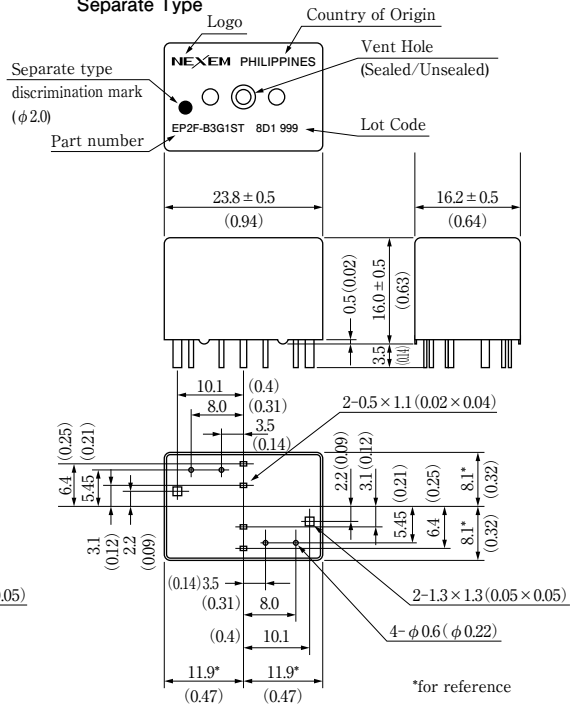


- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

EP1F SERIES

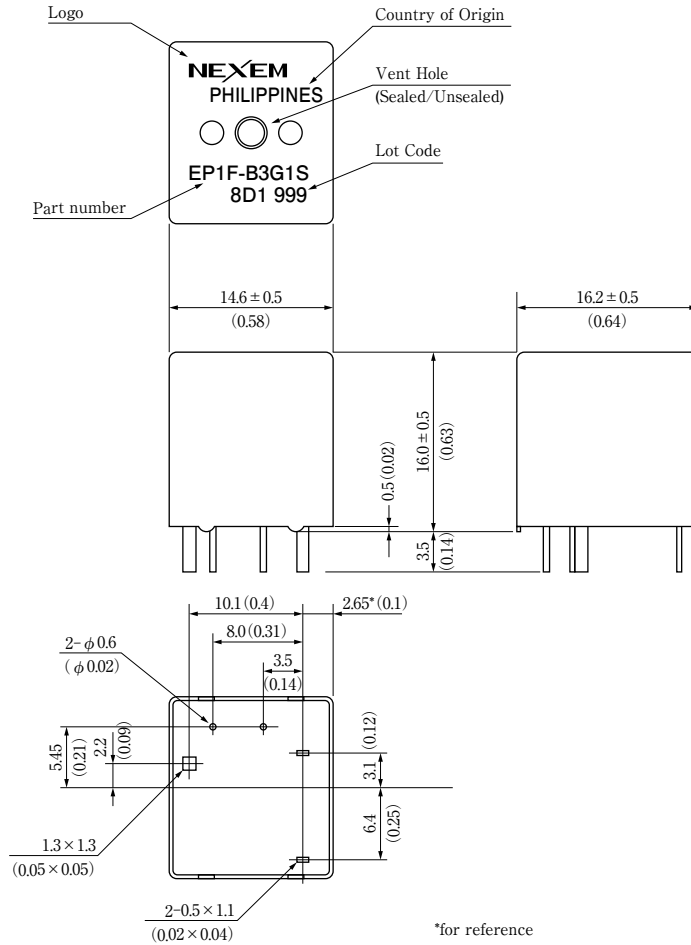

PCB PAD LAYOUT mm (inch) (BOTTOM VIEW)

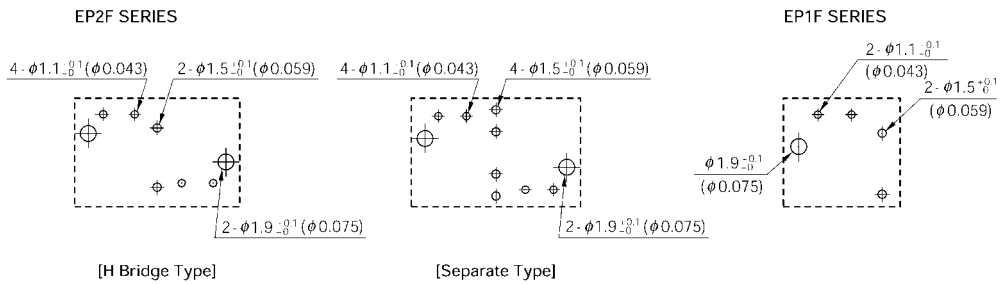

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

SPECIFICATIONS

Items	EPF2	EPF1	
Contact Form	1 Form c × 2 (H bridge type and separate type)	1 Form c	
Contact Material	Silver oxide complex alloy		
Contact Resistance	50 mΩ max. (measured at 7 A) initial		
Contact Switching Voltage	16 VDC max.		
Contact Switching Current	25 A Max.		
Contact Carrying Current	35 A (2 minutes max. 12 VDC at 25°C) 30 A (2 minutes max. 12 VDC at 85°C) 25 A (2 minutes max. 12 VDC at 125°C)	40 A (2 minutes max. 12 VDC at 25°C) 35 A (2 minutes max. 12 VDC at 85°C) 30 A (2 minutes max. 12 VDC at 125°C)	
Operate Time	Approx. 5 ms (at 12 VDC excluding bounce) initial		
Release Time	Approx. 2 ms (at 12 VDC excluding bounce) initial		
Normal Operate Power	0.64 W (at 12 VDC)		
Insulation Resistance	100 MΩ min. (at 500 VDC) initial		
Breakdown Voltage	500 VAC min. (for 1 minute) initial		
Shock Resistance	98 m / s ² min. (misoperating)		
Vibration Resistance	10 to 300 Hz, 43 m/s ² min. (misoperating)		
Ambient Temperature	-40 °C to +125 °C (-40 °F to +257 °F)		
Coil Temperature Rise	50 °C / W (without contact carrying current)		
Running Specifications	Non-load	1 × 10 ⁶ operations	
	Load	Contact G	1 × 10 ⁵ operations (at 14 VDC, Motor Load 25 A / 7 A) at 25°C 1 × 10 ⁵ operations (at 14 VDC, Motor Load 18 A / 5 A) at 125 °C
		Contact L or N	1 × 10 ⁵ operations (at 14 VDC, Motor Load 20 A / 3 A) at 25 °C 1 × 10 ⁵ operations (at 14 VDC, Motor Load 12 A / 2 A) at 125 °C
Weight	Approx. 15 gr	Approx. 8 gr	

COIL RATING

EP2F SERIES

Ambient temperature : 20°C (72°F)

	Part Number		Nominal Voltage (VDC)	Coil Resistance (Ω ± 10%)	Must Operate Voltage (VDC max.)	Must Release Voltage (VDC min.)	Nominal Operate Power (W)
	H Bridge Type	Separate Type					
Contact G	EP2F-B3G1	EP2F-B3G1T	12	225	6.5	0.9	0.64
	EP2F-B3G2	EP2F-B3G2T	12	225	7.0	0.9	0.64
	EP2F-B3G3	EP2F-B3G3T	12	225	7.5	0.9	0.64
Contact L or N	EP2F-B3L1	EP2F-B3L1T	12	225	6.5	0.9	0.64
	EP2F-B3L2	EP2F-B3L2T	12	225	7.0	0.9	0.64
	EP2F-B3L3	EP2F-B3L3T	12	225	7.5	0.9	0.64

EP1F SERIES


Ambient temperature : 20°C (72°F)

	Part Number	Nominal Voltage (VDC)	Coil Resistance (Ω ± 10%)	Must Operate Voltage (VDC max.)	Must Release Voltage (VDC min.)	Nominal Operate Power (W)
Contact G	EP1F-B3G1	12	225	6.5	0.9	0.64
	EP1F-B3G2	12	225	7.0	0.9	0.64
	EP1F-B3G3	12	225	7.5	0.9	0.64
Contact L or N	EP1F-B3L1	12	225	6.5	0.9	0.64
	EP1F-B3L2	12	225	7.0	0.9	0.64
	EP1F-B3L3	12	225	7.5	0.9	0.64




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.


NUMBERING SYSTEM

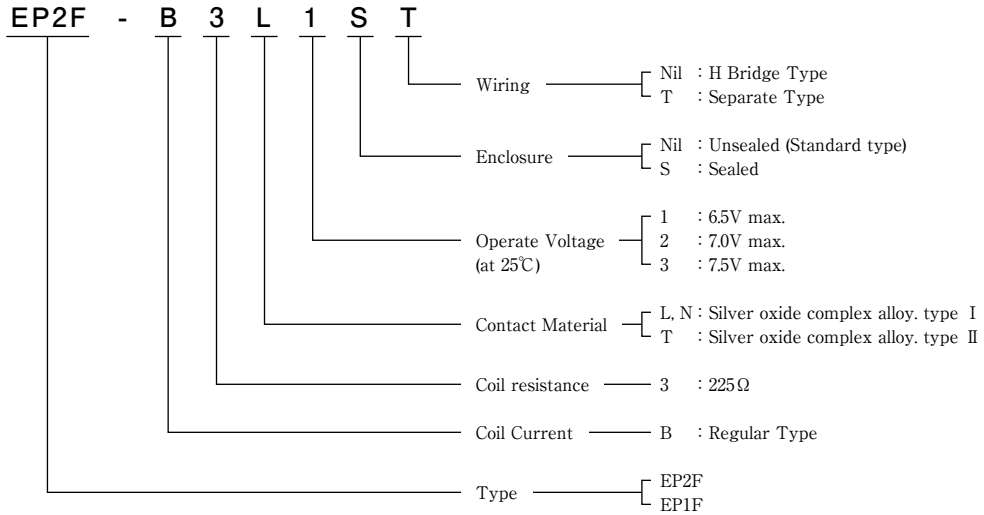

TYPICAL APPLICATION (H Bridge Type)

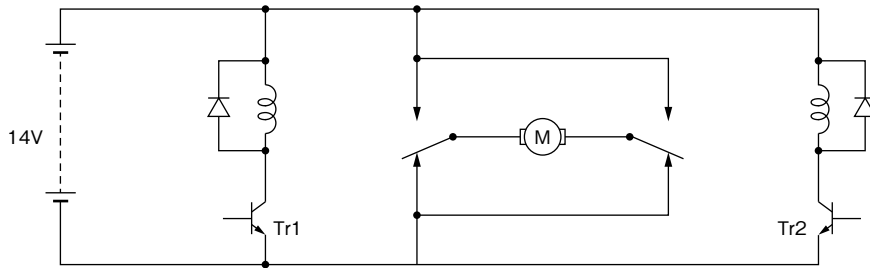

MOTOR	Tr1	Tr2
STOP	off	off
FORWARD	on	off
REVERSE	off	on

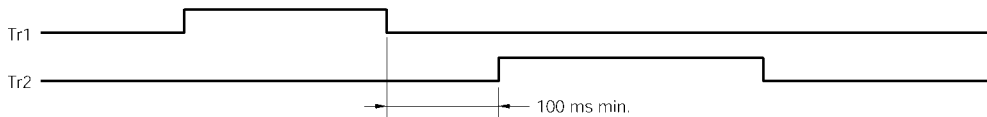



It is necessary to take more than 100 ms intervals for on / off timing between driving Tr1 and Tr2. If the interval is less than 100 ms, an excessive current will happen to the flow of relay contacts.




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

TECHNICAL DATA


Coil Temperature (EP2F-B3L1)

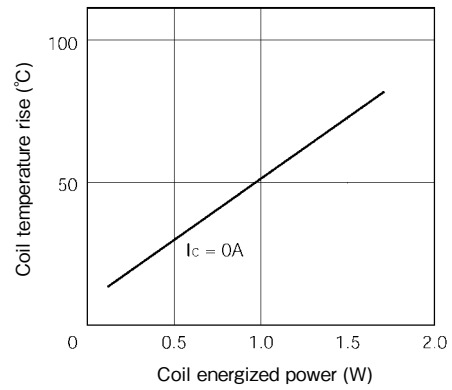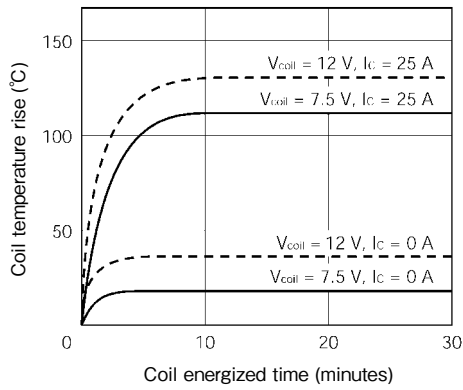

Operate Time (EP2F-B3L1)

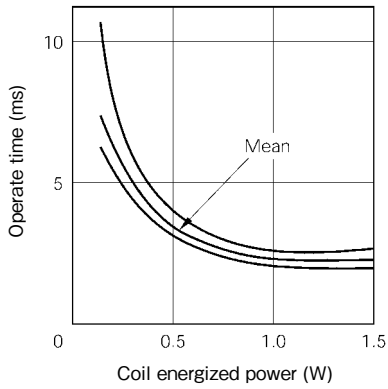

Release Time (EP2F-B3L1)

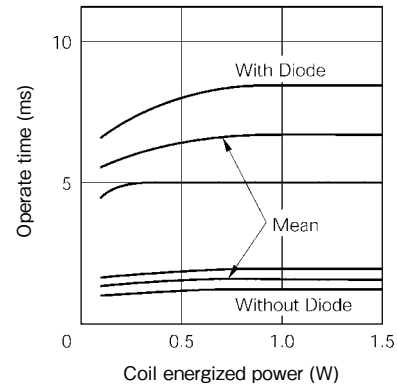

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of EM Devices Corporation. EM Devices Corporation assumes no responsibility for any errors which may appear in this document.

EM Devices Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of EM Devices Corporation or others.

The possibility of defects cannot be eliminated entirely even though EM Devices Corporation has been making continuous effort to enhance the reliability of its electronic components. To minimize risks of damage or injury to persons or property arising from a defect in an EM Devices electronic component, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features. EM Devices products are classified into the following three quality grades:

"Standard," "Special," and "Specific". Specific quality grade applies only to devices developed based on a customer designated quality assurance program for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of EM Devices products are considered as Standard, unless otherwise specified in EM Devices Data Sheets or Data Books. If customers intend to use EM Devices products for applications that are not specified at Standard quality grade, they should contact an EM Devices sales representative in advance.

(Note)

- (1) "EM Devices" as used in this statement means EM Devices Corporation and also includes its majority owned subsidiaries.
- (2) "EM Devices electronic component products" means any electronic component product developed or manufactured by or for EM Devices (as defined above).



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.