

**COMPACT SIZE, SLIM-PACKAGE, LOW POWER CONSUMPTION****DESCRIPTION**


NEXEM ED2/EF2 relay has reduced coil power consumption based compact and slim.

**FEATURES**

- Compact and light weight
- FCC (1500 V) and Telcordia (2500 V) surge capacity
- UL recognized and CSA certified
- Low power consumption (50-70 mW)
- Basic insulation class for EN62368-1
- Moisture Barrier Bag (MBB) packaged EF2 relays meet moisture sensibility level (MSL) of IPC/JEDEC-STD-020

**APPLICATIONS**

Test Equipment, Electronic switching systems, PBX, Terminal equipment, Telephone system

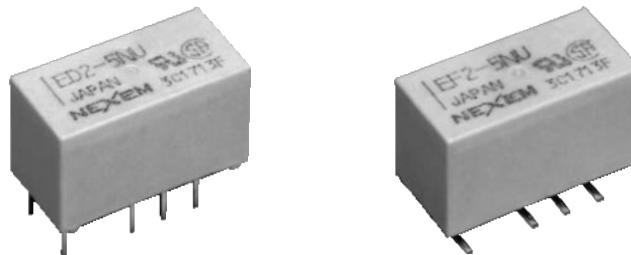**For Right Use of Miniature Relays****DO NOT EXCEED MAXIMUM RATINGS.**

Do not use relays under exceeding conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating, damage to related parts or cause burning.

**READ CAUTIONS IN THE SELECTION GUIDE.**


Read the cautions described in EM Devices' "Miniature Relays" when you choose relays for your application.

The information in this document is subject to change without notice.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

**MARKINGS (Top view)**



- (1) Part number
- (2) Manufacturer
- (3) Country of origin
- (4) Date code
- (5) Direction mark (pin No. 1 and 12)
- (6) UL, CSA marking


**DIMENSIONS**

● **ED2 SERIES**

Unit: mm (inch)

DIMENSIONS


STANDARD / TRIMMED LEAD TYPE

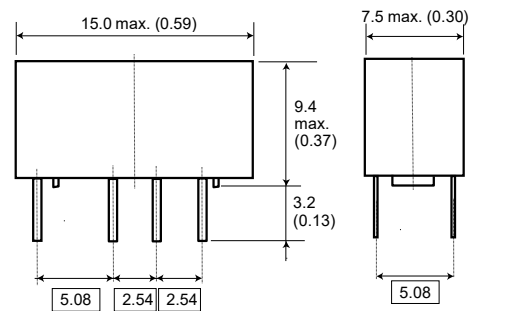

□ is basic size.  
Other tolerances ± 0.2mm

Trimmed lead type: Lead length 2.8mm

PAD LAYOUTS (Bottom view)

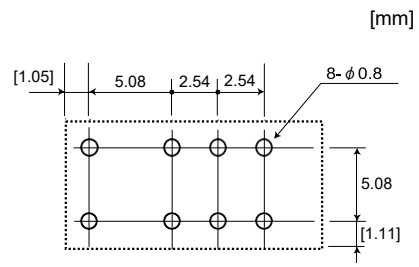


NOTE. General tolerance: ± 0.1

(Bottom view)

PIN CONFIGURATIONS (Bottom view)

Non-latch type

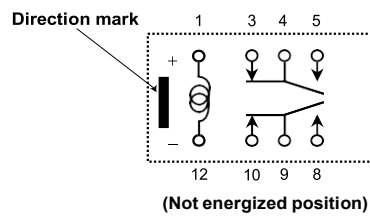


● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
● Please request for a specification sheet for detailed product data prior to the purchase.  
● Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

● EF2 SERIES

Unit: mm (inch)

DIMENSIONS


STANDARD

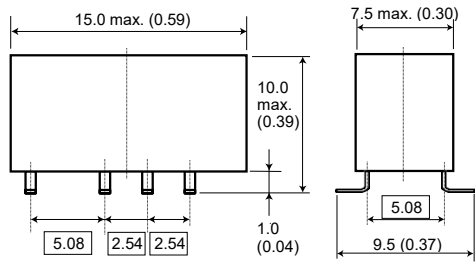

□ is basic size.  
Other tolerances ± 0.2mm


Lead size 0.5 x 0.25 ± 0.1

PAD LAYOUTS (Top view)

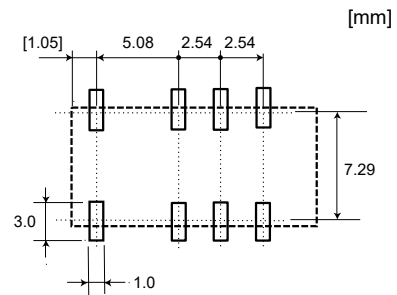


NOTE. General tolerance: ± 0.1

MINIMUM FOOTPRINT TYPE

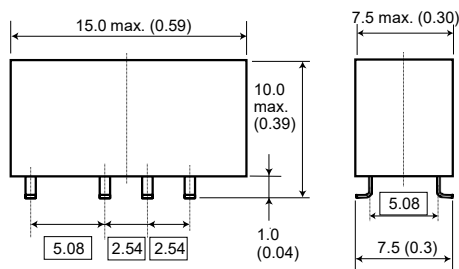


□ is basic size.  
Other tolerances ± 0.2mm

Lead size 0.5 x 0.25 ± 0.1

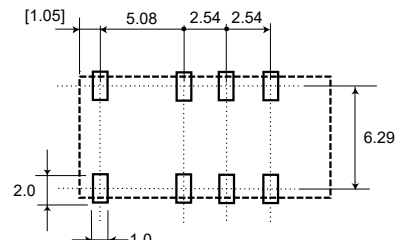


NOTE. General tolerance: ± 0.1

HIGH SOLDER JOINT RELIABILITY TYPE

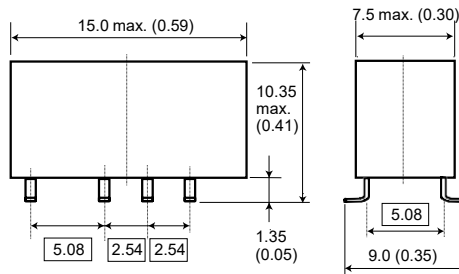

□ is basic size.  
Other tolerances ± 0.2mm


Lead size 0.5 x 0.25 ± 0.1

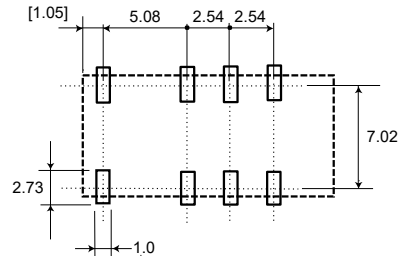

NOTE. General tolerance: ± 0.1

PIN CONFIGURATIONS (Top view)

Non-latch type

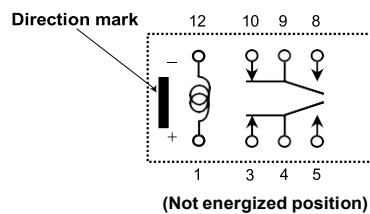

● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
● Please request for a specification sheet for detailed product data prior to the purchase.  
● Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

**GENERAL SPECIFICATIONS**

Contact Form	2 Form C	
Contact Material	Silver alloy with gold alloy overlay	
Maximum Switching Power	30 W, 62.5 VA (resistive)	
Maximum Switching Voltage	220 Vdc, 250 Vac	
Maximum Switching Current	1 A	
Maximum Carrying Current	2 A	
Minimum Contact Ratings	10 m Vdc, 10 µA *1	
Initial Contact Resistance	75 m Ω max.	
Operate Time (Excluding bounce)	Approx. 3 ms	
Release Time (Excluding bounce)	Approx. 2 ms (Without diode)	
Insulation Resistance	1000 MΩ at 500 Vdc	
Withstanding Voltage	Between open contacts	1000 Vac (for one minute), 1500 V surge (10x160 µs *2)
	Between adjacent contacts	1000 Vac (for one minute), 1500 V surge (10x160 µs *2)
	Between coil and contacts	1500 Vac (for one minute), 2500 V surge (2x10 µs *3)
Shock Resistance	735 m/s <sup>2</sup> (75 G) (misoperation)	
	980 m/s <sup>2</sup> (100 G) (destructive failure)	
Vibration Resistance	10 to 55 Hz, double amplitude 3 mm (196 m/s <sup>2</sup> ) (misoperation)	
	10 to 55 Hz, double amplitude 5 mm (294 m/s <sup>2</sup> ) (destructive failure)	
Ambient Temperature	-40 to +85 °C	
Coil Temperature Rise	7 °C / 50 mW, 8 °C / 60 mW, 9 °C / 70 mW	
Running Specifications	Non-load	1x10 <sup>8</sup> operations *4
	Load	50 Vdc 0.1 A (resistive), 1x10 <sup>6</sup> operations at 85 °C, 5 Hz
		10 Vdc 10 mA (resistive), 1x10 <sup>6</sup> operations at 85 °C, 2 Hz
Weight	Approx. 2.2 g	

- \* 1 This value is a reference value in the resistive load.  
Minimum capacity changes depending on switching frequency and environment temperature and the load.
- \* 2 rise time: 10 µs, decay time to half crest: 160 µs
- \* 3 rise time: 2 µs, decay time to half crest: 10 µs
- \* 4 This shows the number of operations without fatal defects. Stable characteristics are maintained for 1 × 10<sup>7</sup> operations.

**COIL SPECIFICATIONS**

Non-latch Type				at 20°C
Nominal Coil Voltage (Vdc)	Coil Resistance (Ω)±10%	Must Operate Voltage* (Vdc)	Must Release Voltage* (Vdc)	Nominal Operating Power (mW)
1.5	45	1.13	0.15	50
3	180	2.25	0.3	50
4.5	405	3.38	0.45	50
5	500	3.75	0.5	50
9	1473	6.75	0.9	55
12	2400	9.0	1.2	60
24	8229	18.0	2.4	70

Note \*Test by pulse voltage



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ●Please request for a specification sheet for detailed product data prior to the purchase.  
 ●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

**SAFETY STANDARD AND RATING**

UL Recognized (UL508) File No E73266	CSA Certificated (CSA C22.2 No14) File No LR46266
30 Vdc, 1 A (Resistive) 110 Vdc, 0.3 A (Resistive) 125 Vac, 0.5 A (Resistive)	

TUV Certificate (EN61810-1)
No. R9950557
Non-latch type
Creepage and clearance of coil to contact is more than 2 mm. (According to EN62368-1)
Basic insulation class


**RECOMMENDED RELAY DRIVE CONDITIONS**

Drive under conditions.

Non-latch type	Voltage: within $\pm 5\%$ of nominal voltage	Ambient temperature - 40 to +85 °C
----------------	--	---------------------------------------

**PART NUMBER SYSTEM**

ED2 - 3 NU




Option  
 NU: Standard  
 NJ: Trimmed lead type

Nominal coil voltage  
 (A numerical value of coil voltage)

ED2 series

EF2 - 3 NU - L

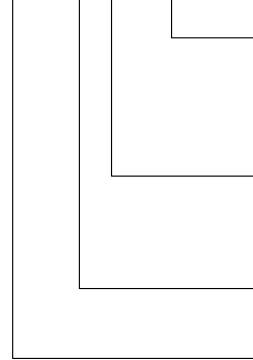

Packing  
 Nil: Tube  
 L: Embossed carrying tape  
 L9: Embossed carrying tape with Moisture Barrier Bag (MBB) (MSL 2a)

Option  
 NU: Standard  
 NUH: Minimum footprint type  
 NUX: High solder joint reliability type

Nominal coil voltage  
 (A numerical value of coil voltage)

EF2 series



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ●Please request for a specification sheet for detailed product data prior to the purchase.  
 ●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

**ORDERING PART NUMBERS**

□ ED2 series

Option		Nominal Coil Voltage (Vdc)	Coil Type
Terminal	Packing		Non-latch
Standard	Tube	1.5	ED2-1.5NU
		3	ED2-3NU
		4.5	ED2-4.5NU
		5	ED2-5NU
		9	ED2-9NU
		12	ED2-12NU
		24	ED2-24NU
Trimmed lead		1.5	ED2-1.5NJ
		3	ED2-3NJ
		4.5	ED2-4.5NJ
		5	ED2-5NJ
		9	ED2-9NU
		12	ED2-12NJ
		24	ED2-24NJ

□ EF2 series

Option		Nominal Coil Voltage (Vdc)	Coil Type
Terminal	Packing		Non-latch
Standard	Tube	1.5	EF2-1.5NU
		3	EF2-3NU
		4.5	EF2-4.5NU
		5	EF2-5NU
		9	EF2-9NU
		12	EF2-12NU
		24	EF2-24NU
	Taping	1.5	EF2-1.5NU-L
		3	EF2-3NU-L
		4.5	EF2-4.5NU-L
		5	EF2-5NU-L
		9	EF2-9NU-L
		12	EF2-12NU-L
		24	EF2-24NU-L
	Taping (MBB)	1.5	EF2-1.5NU-L9
		3	EF2-3NU-L9
		4.5	EF2-4.5NU-L9
		5	EF2-5NU-L9
		9	EF2-9NU-L9
		12	EF2-12NU-L9
		24	EF2-24NU-L9



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ●Please request for a specification sheet for detailed product data prior to the purchase.  
 ●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

□ EF2 series

Option		Nominal Coil Voltage (Vdc)	Coil Type
Terminal	Packing		Non-latch
Minimum footprint	Tube	1.5	EF2-1.5NUH
		3	EF2-3NUH
		4.5	EF2-4.5NUH
		5	EF2-5NUH
		9	EF2-9NUH
		12	EF2-12NUH
		24	EF2-24NUH
	Taping	1.5	EF2-1.5NUH-L
		3	EF2-3NUH-L
		4.5	EF2-4.5NUH-L
		5	EF2-5NUH-L
		9	EF2-9NUH-L
		12	EF2-12NUH-L
		24	EF2-24NUH-L
	Taping (MBB)	1.5	EF2-1.5NUH-L9
		3	EF2-3NUH-L9
		4.5	EF2-4.5NUH-L9
		5	EF2-5NUH-L9
		9	EF2-9NUH-L9
		12	EF2-12NUH-L9
	High Solder joint reliability	Tube	1.5
3			EF2-3NUX
4.5			EF2-4.5NUX
5			EF2-5NUX
9			EF2-9NUX
12			EF2-12NUX
24			EF2-24NUX
Taping		1.5	EF2-1.5NUX-L
		3	EF2-3NUX-L
		4.5	EF2-4.5NUX-L
		5	EF2-5NUX-L
		9	EF2-9NUX-L
		12	EF2-12NUX-L
		24	EF2-24NUX-L
Taping (MBB)		1.5	EF2-1.5NUX-L9
		3	EF2-3NUX-L9
		4.5	EF2-4.5NUX-L9
		5	EF2-5NUX-L9
		9	EF2-9NUX-L9
		12	EF2-12NUX-L9
24		EF2-24NUX-L9	

Note:

1. Only MBB packaging part numbers meet MSL (L9: MSL 2a). However, it does not fully conform to JEDEC standards such as classification temperature. Please note that part numbers other without MBB packaging do not meet MSL.





- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

**PERFORMANCE DATA**

COIL TEMPERATURE RISE


Temperature is measured by coil resistance.

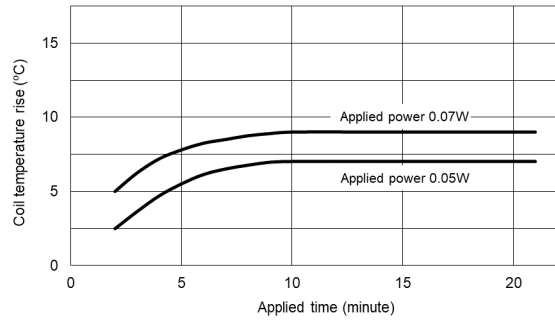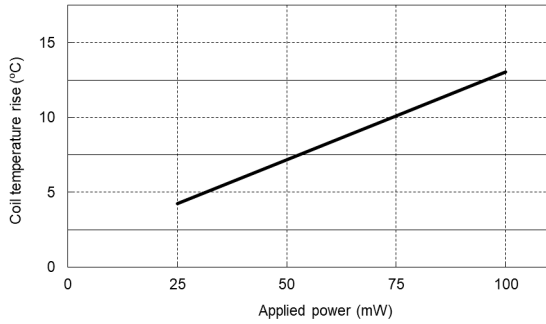

SWITCHING CAPACITY

This is allowed maximum value.


Inquire with EM Devices for maximum value under continuous

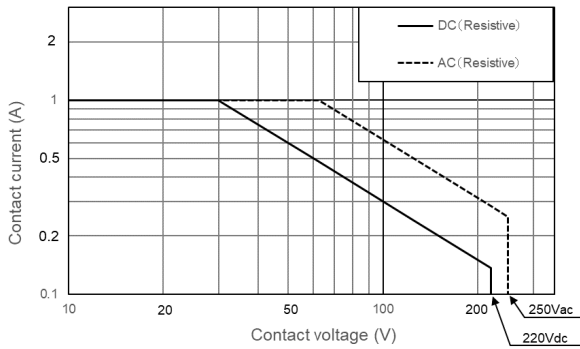



MAXIMUM COIL VOLTAGE

This is a maximum value of permissible alteration.

Inquire with EM Devices under continuous use.

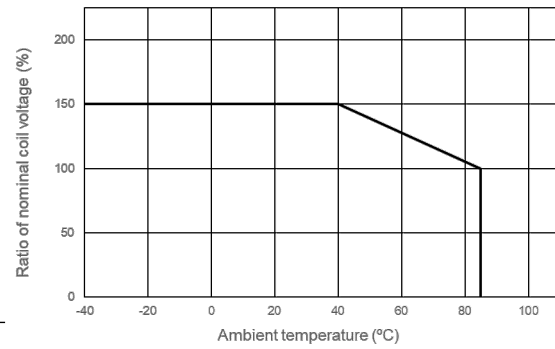


APPLIED POWER VS. TIMING (Sample: ED2-5NU)

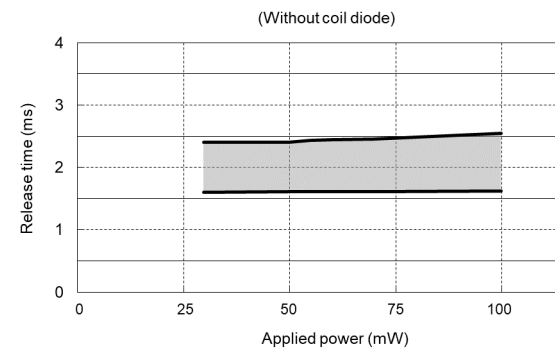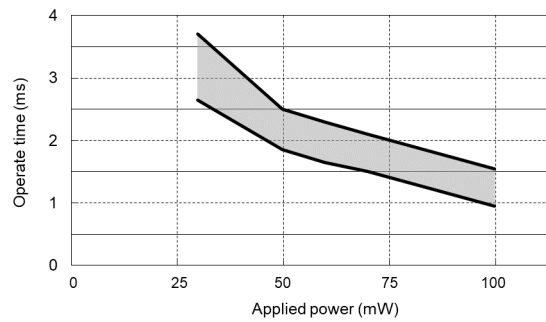

● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ● Please request for a specification sheet for detailed product data prior to the purchase.  
 ● Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide



□ OPERATE AND RELEASE VOLTAGE VS. AMBIENT TEMPERATURE

This shows a typical change of operate (release) voltage. The value of must operate is estimated, so coil voltage must be applied more than this value for safety operation. For hot start operation, please inquire with EM Devices.

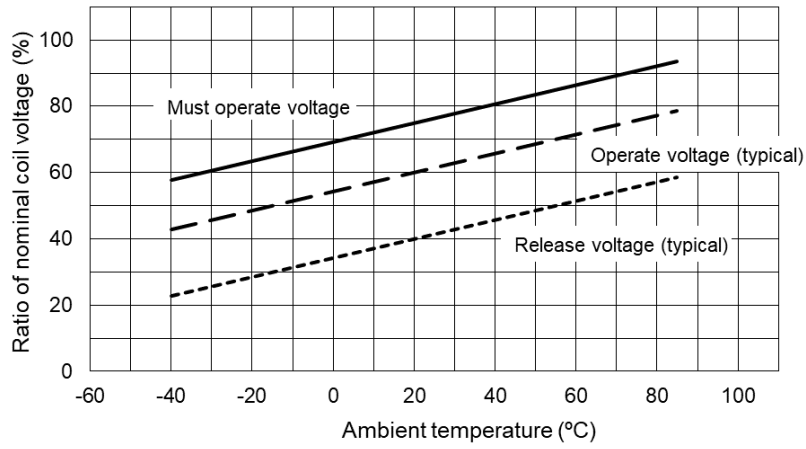



□ RUNNING TEST (Non-load)

(Load: none, Drive: 5Vdc, 50Hz, 50% duty, Ambient temperature: room temperature, Sample: ED2-5NU, 20pieces)

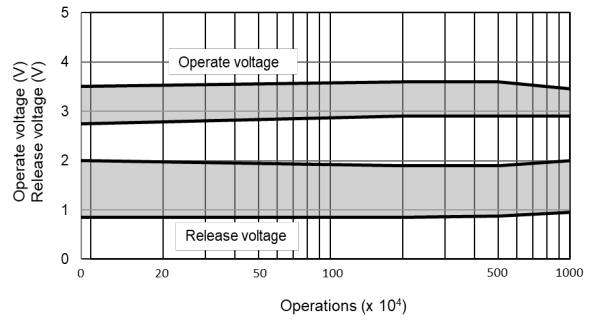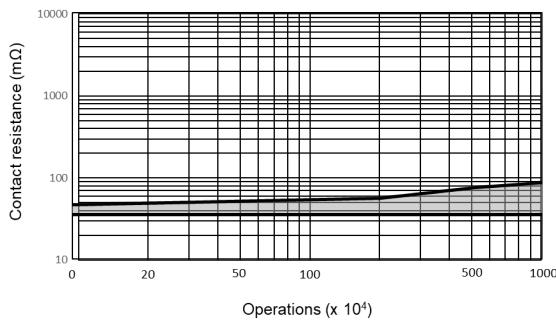

□ RUNNING TEST (Load)

(Load: 50Vdc 0.1A resistive, Drive: 5Vdc, 5Hz, 50% duty, Ambient temperature: 85°C, Sample: ED2-5NU, 10pieces)

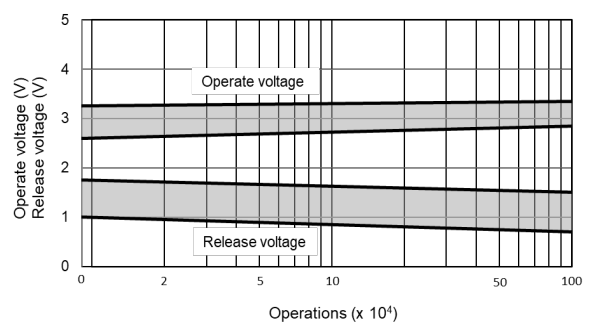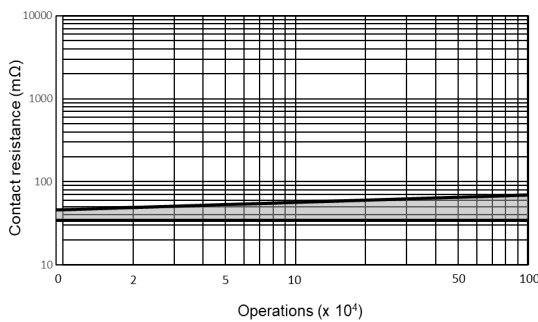


● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ● Please request for a specification sheet for detailed product data prior to the purchase.  
 ● Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide


□ BREAKDOWN VOLTAGE

Sample: ED2-5NU 10pieces


(a) Between open contacts

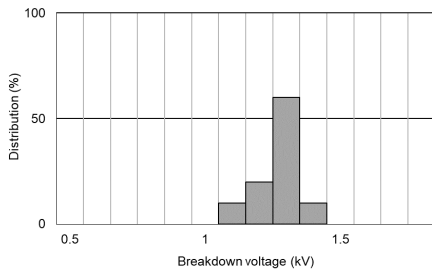

(b) Between adjacent contacts

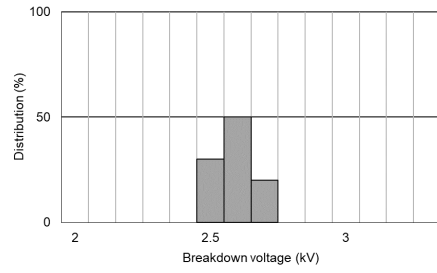


(c) Between coil and contacts


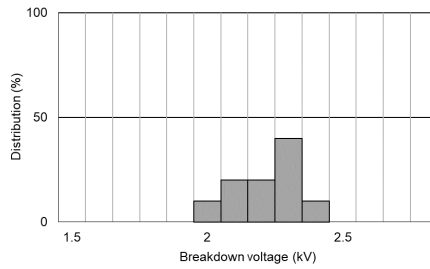


□ ALTERNATION OF VOLTAGE AT DENSELY MOUNTING (Magnet interference)

Alternation of operate voltage

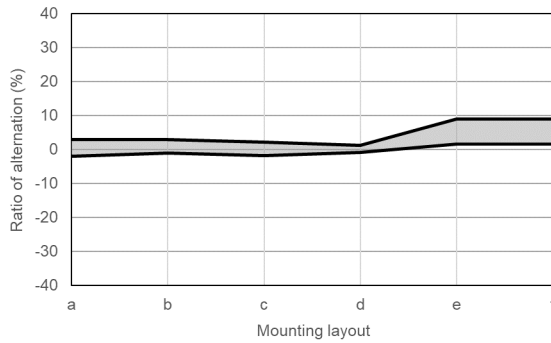

Alternation of release voltage

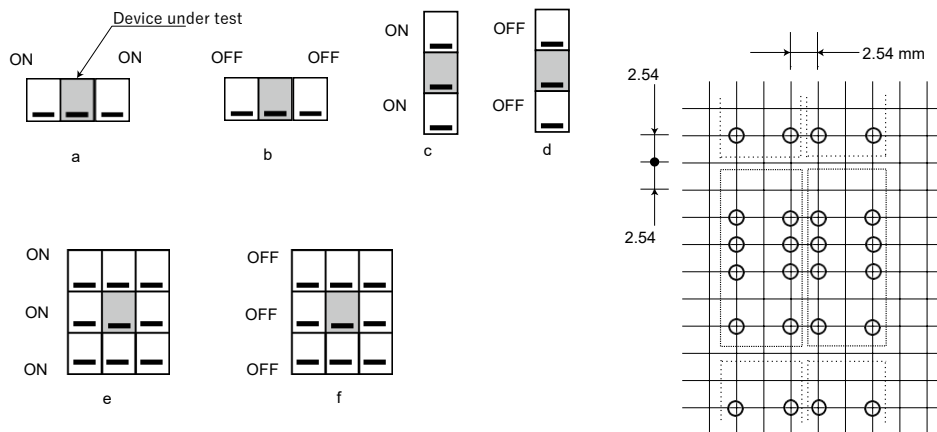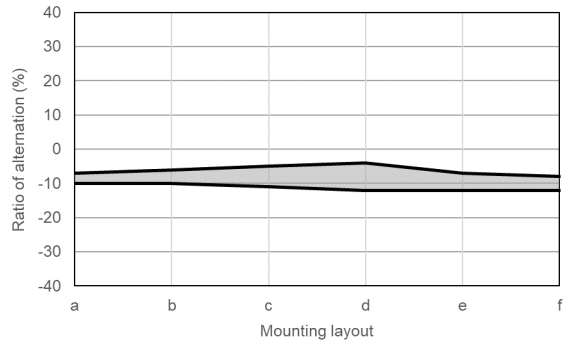


● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ● Please request for a specification sheet for detailed product data prior to the purchase.  
 ● Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

**PACKING DIMENSIONS**


**(Unit: mm)**

**TUBE PACKING (ED2/EF2)**

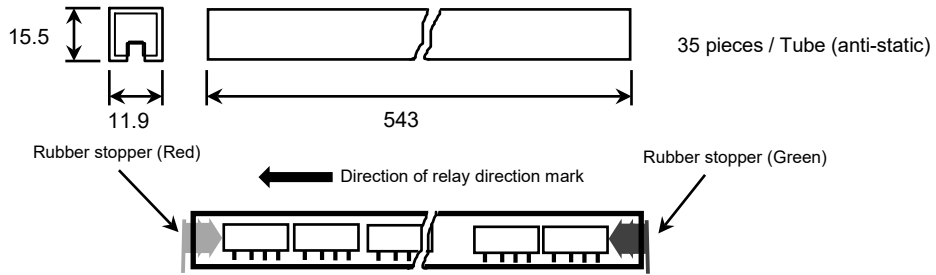

**TAPE PACKING (EF2)**


**APPEARANCE**

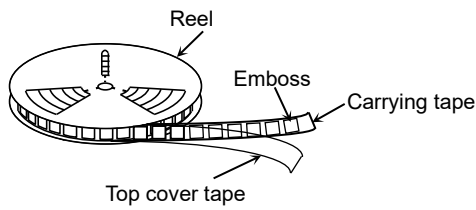

Reel material: Corrugated Cardboard (L)  
PS (L9: MBB)  
Relay quantity: 500 pieces / Reel  
L9 has two reels are sealed in one MBB.  
Reel diameter: 380mm


**TAPE DIMENSIONS**

**For EF2-xxxx-L**

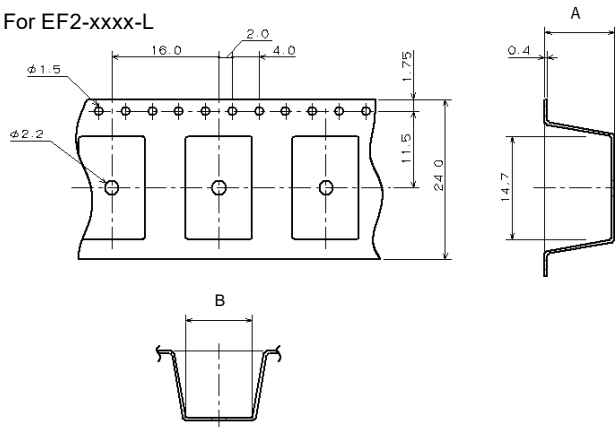

	A	B
EF2-xxNU-L	Max.10.9	10.0
EF2-xxNUX-L	Max.11.1	8.0

**For EF2-xxxx-L9**

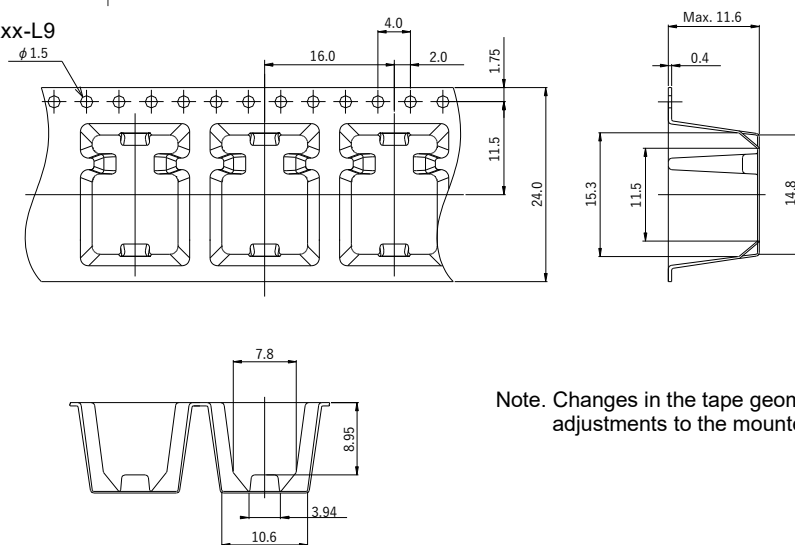


Note. Changes in the tape geometry may require adjustments to the mounted machine.



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
●Please request for a specification sheet for detailed product data prior to the purchase.  
●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

RELAY DIRECTION AND TAPE CARRYING DIRECTION

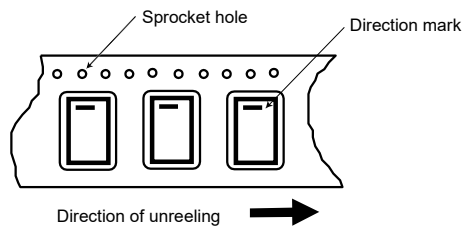

**SOLDERING TEMPERATURE CONDITION**

THROUGH-HOLE MOUNTING (ED2)

1. Automatic soldering

Preheating (Terminal): 110~ 120°C / 110s. max.  
 Solder temperature: 260°C max.  
 Soldering time: 5s max.

Note: EM Devices recommends cooling down a printed circuit board less than 110°C within 40s after soldering. The above are flow soldering conditions. Check the actual soldering condition to use other automatic soldering methods.


2. Manual soldering (by soldering iron)

Soldering temperature (Tip): 350°C max.  
 Soldering time: 3 s max.

Note: Heating of this product by automatic soldering and manual soldering is limited to a total of three times.

SURFACE-MOUNTING TYPE (EF2)

1. Reflow Method (NEXEM recommend profile)

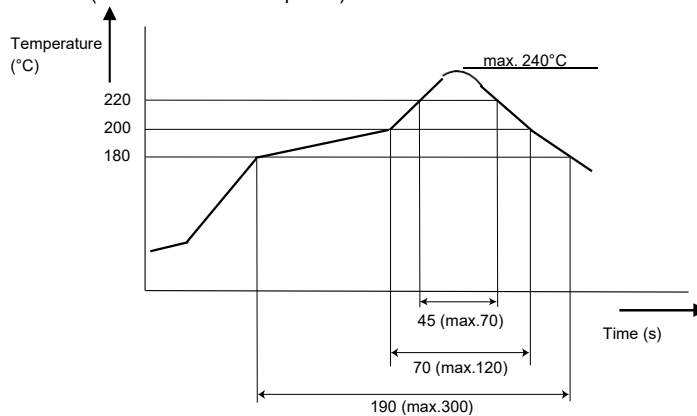

Note:

1. Temperature profile shows printed circuit board surface temperature on the relay terminal portion.
2. Heating by reflow should be limited to two times. However, allow sufficient time for cooling of the product between the first and second reflow.
3. Check the actual soldering condition to use other method except above mentioned temperature profiles.



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ●Please request for a specification sheet for detailed product data prior to the purchase.  
 ●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

NOTE ON CORRECT USE


1. Notes on contact load

Make sure that the contact load is within the specified range; otherwise, the lifetime of the contacts will be shortened considerably.

Note that the running performance shown is an example, and that it varies depending on parameters such as the type of load, switching frequency, driver circuit, and ambient temperature under the actual operating conditions. Evaluate the performance by using the actual circuit before using the relay.

2. Driving relays

- If the internal connection diagram of a relay shows + and - symbols on the coil, apply the rated voltage to the relay in the specified direction. If a rippled DC current source is used, abnormalities such as beat at the coil may occur.
- The maximum voltage that can be applied to the coil of the relay varies depending on the ambient temperature. Generally, the higher the voltage applied to the coil, the shorter the operating time. Note, however, that a high voltage also increases the bounce of the contacts and the contact opening and closing frequency, which may shorten the lifetime of the contacts.
- If the driving voltage waveform of the relay coil rises and falls gradually, the inherent performance of the relay may not be fully realized. Make sure that the voltage waveform instantaneously rises and falls as a pulse.

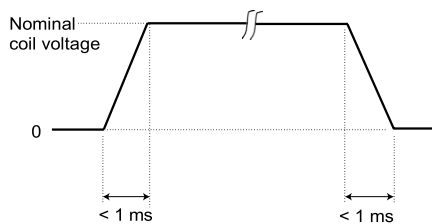


- For a latching relay, apply a voltage to the coil according to the polarity specified in the internal connection diagram of the relay.
- If a current is applied to the coil over a long period of time, the coil temperature rises, promoting generation of organic gas inside the relay, which may result in faulty contacts. In this case, use of a latching relay is recommended.
- The operating time and release time indicate the time required for each contact to close after the voltage has been applied to or removed from the coil. However, because the relay has a mechanical structure, a bounce state exists at the end of the operating and release times. Furthermore, because additional time is required until the contact stabilizes after being in a high-resistance state, care must be taken when using the relay at high speeds.

3. Operating environment

- Make sure that the relay mounted in the application set is used within the specified temperature range. Use of a relay at a temperature outside this range may adversely affect insulation or contact performance.

- If the relay is used for a long period of time in highly humid (RH 85% or higher) environment, moisture may be absorbed into the relay. This moisture may react with the NOx and SOx generated by glow discharges that occur when the contacts are opened or closed, producing nitric or sulfuric acid. If this happens, the acid produced may corrode the metallic parts of the relay, causing operational malfunction.
- If any material containing silicone (silicone rubber, silicone oil, and silicone-based coating material) is used in the neighborhood of relay, there is some possibility that these materials will emit silicone gas that will penetrate the relay. In this case, the switching contact may generate silicone on the surface of contacts. This silicone may result in contact failure. Avoid use of relay in such an environment.
- Because the operating temperature range varies depending on the humidity, use the relay in the temperature range illustrated in the figure below. Prevent the relay from being frozen and avoid the generation of condensation.

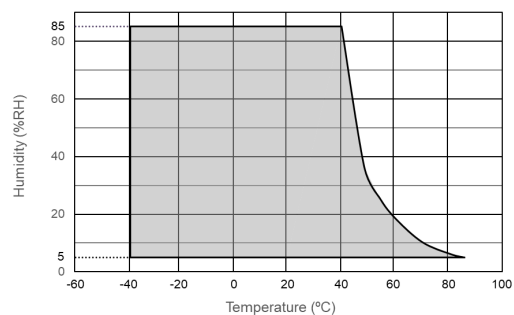

- The same applies when the relay is stored or transported. Keep the upper-limit value of the temperature to which the relay is exposed after it is removed from the carton box to within 50°C. Please also refer to "5. Handling" for SMT relays.
- Permanent magnets are used in polarized relays. For this reason, when magnets, transformers, or speakers are located nearby the relay characteristics may change and faulty operations may result.
- The relay maintains constant sealability under normal atmospheric pressure (810 to 1,200 hPa). Its sealability may be degraded or the relay may be deformed and malfunction if it is used under barometric conditions exceeding the specified range. Avoid using vacuum oven during baking or drying cleaning solutions.
- If excessive vibration or shock is applied to the relay, it may malfunction, and the contacts remain closed. Vibration or shock applied to the relay during operation may cause considerable damage to or wearing of the contacts. Note that operation of a snap switch mounted close to the relay or shock due to the operation of magnetic solenoid may also cause malfunctioning.



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ●Please request for a specification sheet for detailed product data prior to the purchase.  
 ●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

4. Notes on mounting relays

- When mounting a relay onto a PC board using an automatic chip mounter, if excessive force is applied to the cover of the relay when the relay is chucked or inserted, the cover may be damaged, or the characteristics of the relay degraded. Keep the force applied to the relay to within 1 kg.
- Avoid bending the pins to temporarily secure the relay to the PC board. Bending the pins may degrade sealability or adversely affect the internal mechanism.
- It is recommended to solder the relay onto a PC board under the following conditions:

<1> Reflow soldering

Refer to the recommended soldering temperature profile. Please note that excessive heating beyond the specified peak temperature or heating time will damage the airtightness.

<2> Flow soldering

Solder temperature: 260°C max., Time: 5s max.  
 Preheating (Terminals): 110~120°C / 110s. (max.)  
 EM Devices recommends cooling down a printed circuit board less than 110°C within 40 seconds after soldering.

<3> Manual soldering

Soldering temperature (Tip): 350°C, Time: 3s max.  
 Avoid immersing the relay in cleaning solvent immediately after soldering due to the danger of thermal shock being applied to the relay.

- Use an alcohol-based or water-based cleaning solvent. Never use thinner and benzene because they may damage the relay housing.
- Do not use ultrasonic cleaning because the vibration energy generated by the ultrasonic waves may cause the contacts to remain closed.
- When using a vacuum oven to dry the cleaning solution, the relay's seal-ability may be compromised. Avoid drying conditions lower than normal atmospheric pressure.

5. Handling

- Relays are packaged in magazine cases for shipment. If a space is created in the case after some relays have been removed, be sure to insert a stopper to secure the remaining relays in the case. If relays are not well secured, vibration during transportation may cause malfunctioning of the contacts.
- Exercise care in handling the relay so as to avoid dropping it or allowing it to fall. Do not use a relay that has been dropped. If a relay drops from a workbench to the floor, a shock of 9,800 m/s<sup>2</sup> (1,000 G) or more is applied to the relay, possibly damaging its functions. Even if a light shock has been applied to the relay, thoroughly evaluate its operation before using it.
- Latching relays are factory-set to the reset state for shipment. A latching relay may be set, however, by vibration or shock applied while being transported. Be sure to forcibly reset the relay before using it in the application set. Also note that the relay may be set by unexpected vibration or shock when it is used in a portable set.

- The sealability of a surface mount type (SMT) relay may be lost if the relay absorbs moisture and is then heated during soldering. When storing relays, therefore, observe the following points:

<1> For standard packing

(a). Pack state

Term: Less than 12 months after our shipment.  
 (Recommend using the product within 3 months if possible.)

Conditions: <30 °C, <60% RH

(b). Require bake before mounting, when relays not used within the above (a) period or was stored outside above (a) conditions.

Simple relay: Please dehumidify 85 ± 5 °C, 48 hours or more after transferring to a heat-resistant container.

Tape packing: Please dehumidify 50 ± 5 °C, 300 hours or more in reel condition.

Tube packaging should be baking on simple relays, removed from tube.

Relays after baking should be mounted within 3 months under the conditions in (a).

Standard packaging specification products do not meet with the JEDEC standard's Moisture Sensitivity Level (MSL) because they are not MBB packaged. If MSL compliance is required, use MBB packaging specification products.

<2> For MBB packing

(a). MBB state

Term: Less than 12 months after our shipment

Conditions: <30 °C, <60% RH

(b). After opening of MBB

Term: Within the time limit indicated on the caution label attached to MBB.

Conditions: <30 °C, <60% RH

(c). Require bake before mounting, when relays not used within the above (a) or (b) period or was stored outside above conditions.

Simple relay: Please dehumidify 85 ± 5 °C, 48 hours or more after transferring to a heat-resistant container.

Tape packing: Please dehumidify 50 ± 5 °C, 300 hours or more in reel condition. Please keep in mind that barrier pack needs to remove in that case.

Relays after baking should be mounted within the time limits according to MSL on the caution label under the conditions in (b).

The humidity indicator card included in MBB package immediately after opening should also be used as a basis for judging baking procedures.



●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.  
 ●Please request for a specification sheet for detailed product data prior to the purchase.  
 ●Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of EM Devices Corporation. EM Devices Corporation assumes no responsibility for any errors which may appear in this document.

EM Devices Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of EM Devices Corporation or others.

While EM Devices Corporation has been making continuous effort to enhance the reliability of its electronic components, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an EM Devices electronic component, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

EM Devices' products are classified into the following three quality grades: "Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application. If customers intend to use EM Devices' products for applications other than those specified for Standard quality grade, they should contact an EM Devices sales representative in advance, as specifications must be exchanged with EM Devices.

**Standard:** Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

**Special:** Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

**Specific:** Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of EM Devices' products is "Standard" unless otherwise specified in EM Devices' Data Sheets or Data Books. EM Devices cannot guarantee the quality of our products if the product is used for applications other than "Standard" applications without exchanging specifications with EM Devices, or if the product is used for "Standard" applications under conditions or in environments not described in this document.

(Note)

The information in this document is subject to change without notice. Please refer to the latest data sheet when designing for mass production.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please also read "NOTES ON CORRECT USE" in the selection guide